


DM-2

Low Cost, Pulse Input Totalizer/Ratemeter

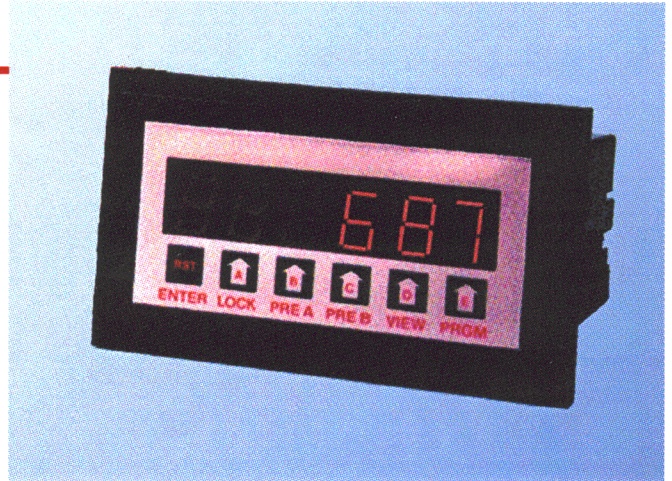

Features

- *CSA Approved*
- *Separate Scaling Factors For A & B Inputs*
- *Displays Rate & Total*
- *Pulse Input - 10 kHz Max.*
- *Security Lockout*
- *RS422/RS232 Serial Communication*
- *NEMA 4X / IP65 Front Panel*
- *Separate Add/Subtract Simultaneous Inputs*
- *Quadrature & Unidirectional Control Inputs*
- *30mV Magnetic Pickup Inputs*
- *4-20mA or 0-20mA Analog Output*

Application:

Any rate, total or blending application where 2 preset alarms and scaling are required.

Description:

The DM-2 is a 6 digit totalizer / ratemeter with two level, 5 digit preset alarm control of total or rate. Inputs A & B have separate scaling K-factors. The totalizer can be programmed for "A" subtract "B", "A" add "B" or A & B as separate totalizers, with display and control of the "net" total and rate of "A".

The DM-2 is also available by request in 4 other versions:

- MC2 - a two preset totalizer with scaling
- MR2 - a high/low alarm ratemeter with scaling
- MC - a totalizing counter only
- MR - a rate meter display only

If only one input is required, the unit will display the total and rate from that one channel. The DM-2 can accept up to 10,000 pulses per second. It has a 5-digit floating decimal scale factor allowing total readout in true engineering units and rate per second, minute or hour.

Input "A" simultaneously drives a ratemeter which can be programmed to display the basic frequency (rate per second) or factored to show rate per minute or rate per hour. Simply push the "VIEW" button to see either total or rate without losing a count. Two separate 5 A relay contacts can be set to operate at either rate or total presets in a latch or auto-recycle mode with output timing from 0.1 to 99.9 seconds.

Two control outputs can be assigned to either the totalizer or ratemeter and can automatically recycle at the batch or stay latched until reset.

Up to 99 units can communicate to a host computer on a single RS232 or RS422 loop.

Specifications:

Display: 6 digit, 0.55" High LED

Input Power:

- 110 VAC $\pm 15\%$ or 12 to 15 VDC (standard)
- 220 VAC $\pm 15\%$ or 12 to 15 VDC (available upon request)
- 24VAC $\pm 15\%$ or 12 to 15 VDC (available upon request)

Current: 250 mA DC max. or 6.5 VA AC

Output Power: +12 VDC @ 50 mA, unregulated -10 + 50%
(AC powered units only)

Temperature Operating: +32°F (0°C) to +130° F (+54°C)

Temperature Storage: -40° F (-40°C) to +200° F (93°C)

Humidity: 0-90% Noncondensing

Memory: EEPROM stores data for 10 years if power is lost.

Inputs:

- 3: High Impedance DC pulse input 4-30 VDC (high), Open or 0-1 VDC (low), 10 K Ω imp. 10 kHz max. speed. Accepts simultaneous inputs.
- 3M: Mag. Input, Input A only, accepts 30mV input (50 V max. P/P) signals 10 K Ω imp. 5 kHz max. (Input B, 4-30V)
- 3MB: Mag. Input, Inputs A & B, accepts 30mV input (50 V max. P/P) signals 10 K Ω imp. 5 kHz max.
- 5: 4-30 V Count pulses on Input A, 4-30 V Direction Control input (level) on Input B.
- 5M: 30 mV Count pulses on Input A (50 V max. P/P) 4-30 V Direction Control input (level) on Input B
- 8: Optically Isolated, AC/DC pulsing for Inputs A, B & Reset, Low: 0-20V AC/DC, High: 75-240V AC/DC; 20Hz max (min ON/OFF: 25 msec), Impedance: min. 100K
- 9: Quadrature, accepts 4-30 V pulses with 90° phase shift for direction detection.
- 9MB: Quadrature, accepts 30 mV (50 V max. P/P) pulses with 90° phase shift for direction detection.

Approvals: CSA File# LR91109-7, CE Approved (optional)

Reset:

Front Panel: Resets displayed value and control output

Remote: 4-30 VDC (75 - 240 V AC/DC, Input 8) negative edge resets Totalizer "A" and control output

Control Outputs: Relays: 2 each N.O. Relay; 5 Amps 120/240 VAC or 28 VDC. (N.C. relay contacts and NPN transistor output available with solder jumpers. Transistor output is internally pulled up to 10 VDC through relay coil, sinks from 10 VDC to .5 V @ 100 mA)

Analog Output: An optional 4-20mA (0-20mA) output is available for the DM-2 series.

The output can be programmed to track rate or total. Connections are via a 2 terminal pluggable screw connector.

Programming is accomplished by using the front panel in conjunction with rear dip switches.

Accuracy: $\pm .25\%$ FS worst case.

Compliance Voltage: 3 to 30 VDC non inductive.

Scaling Factor (K-Factor): In the standard unit, a user programmable K-Factor is used to convert the input pulses to engineering units. The 5 digit K-Factor dividers, with decimal keyed into any position, allow easy direct entry of any K-Factor from 0.0001 to 99999. Separate factors may be entered for the 2 separate input channels.

Presets: Two control outputs are provided. To set relay values, press "menu" button until "Relay" appears on the display, the A and B outputs can be assigned to the ratemeter (high/low), one preset for rate and one for total, or two presets (2 stage shut off) on the A and B totalizers. A 5 digit value can be entered for both presets and the decimal point location is the same as the counter. The outputs can be set to energize from 0.1 to 99.9 seconds or latch (0.0). If a value other than 0.0 is entered, the totalizers will auto reset at the preset. In the A-B or A+B versions, the relays will be assigned to either net total or A rate.

Lockout: Unauthorized front panel changes can be prevented by entering a user selected 5 digit code in the "LOC" mode. The front panel can be completely locked out or the presets can remain accessible.

Ratemeter: Accuracy: 0.01% FS (+1 display digit). The rate display updates once per second. The rate meter can be programmed to accept almost any number of pulses per unit of measurement, sample from 2 to 24 seconds maximum, and auto-range up to 5 digits of significant information. In the "RPS" mode, the ratemeter displays in units per second, and in the "scale" mode, units per hour or per minute. The unit will display the rate of the A Input only.

Totalizer: The two 6-digit totalizers can count at 10 kHz max. Each can have a 5-digit dividing scale factor. The totalizer advances on the positive edge of each pulse. Count up or down modes available, as are quadrature inputs from encoders for position or flow measurement. The unit can be programmed to view the net value of "A+B" or "A-B", or A and B as separate totalizers.

RS232/RS422 Serial Interface: If the serial interface option is supplied, up to 99 units can be linked together. (The terminal addressing the unit must be capable of driving all loads in the loop.) Unit status and new set points can be communicated by serial communication. Mode changes, however, must always be made on the front panel.

Data is received and transmitted over standard EIA RS232 or RS422 levels. Each 10 bit character is made up of a start bit, 7 bit ASCII code, parity bit and stop bit. Unit number, baud rate and parity are entered in the "Program Setting" set up mode and remain in memory even if power is off.

Note that the input impedance of RS232 is 3K or 7K Ohm worst case. The terminal addressing the unit must be capable of driving all loads in the loop. RS422 input impedance is much higher and there is usually no problem driving 25 units. Unit serial transmit line remains in a high impedance "OFF" state until addressed.

Ordering Information:

Specify **ROOTS® DM-2**

with **Options:**

(110 Volt - Part Number 053218-001)

• RS-232 p/n 053218-002

• 4-20mA p/n 053218-003

(RS-232 and 4-20mA not available in same unit)



POWER EQUIPMENT CO.

Manufacturers Representative

2011 Williamsburg Rd. • Richmond, VA 23231

(804) 236-3800 • FAX (804) 236-3882

www.peconet.com