# Eclipse ImmersoJet Burners

Model 8"IJ Version 2

#### **Main Specifications**


PARAMETER		BLOWER SIZE	
Blower Type		15"w.c. Packaged (60Hz)	Remote Blower
Maximum Input (Btu/hr)		3,500,000	4,800,000
Minimum Input (Btu/hr)		300,000	300,000
Air Inlet Pressure ("w.c.) @Max. Input - Air pressure at burner inlet (Tap "A")		16.5	19.5
Blower Motor Horse Power		3.0	As Specified
Main Gas Pressure ("w.c.) into regulator	Max.	125	125
	Min.	21	28
Tube Backpressure ("w.c.)		2.0	3.8
Weight-less actuator (lbs)		290	185
CO emissions (ppm)		<100	<100
Piping		N.P.T. or B.S.P.	
Flame Detection		Flamerod or U.V. Scanner.	
Fuel <sup>(1)</sup>		Natural gas, Propane, Butane For any other mixed gas, contact Eclipse for orifice sizing.	

(1) Different fuels require different orifices.


- All information is based on laboratory testing with a tube effective length of 51.7 feet. Different tube sizes and conditions may affect the data.
- All information is based on standard tube design. Changes in the tube will alter performance and pressures.
- All inputs based upon gross caloric values.
- Eclipse reserves the right to change the construction and/or configuration of our products at any time without being obliged to adjust earlier supplies accordingly.
- Plumbing of air and gas will affect accuracy of orifice readings. All information is based on generally acceptable air and gas piping practices.



### **Performance Data**

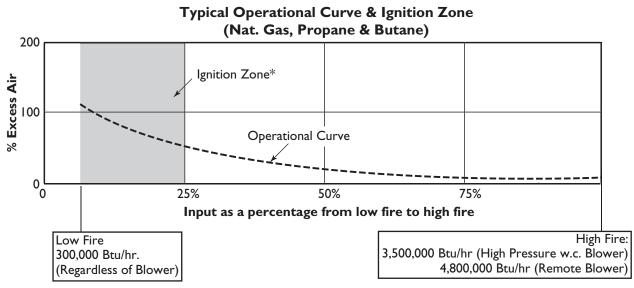


\* Note: A slow acting solenoid or a solenoid positioned between ratio regulator and burner is required.

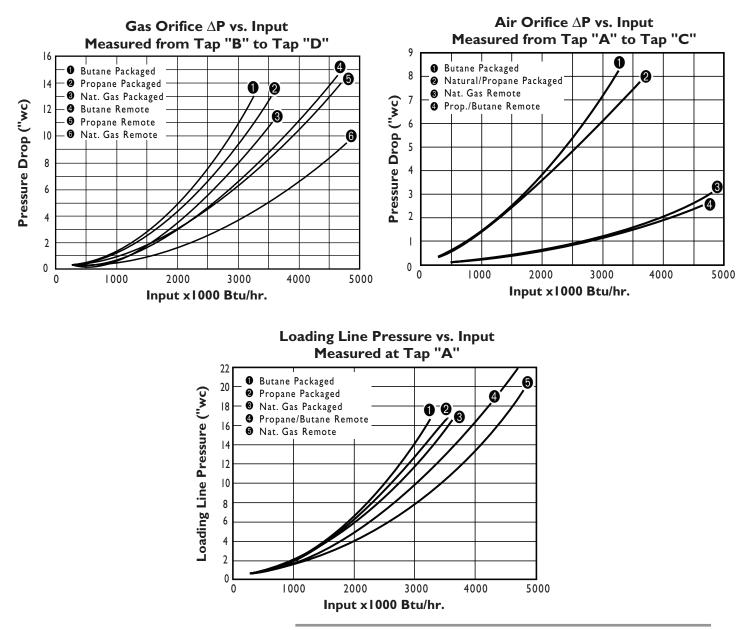

Eclipse Model 8"IJ, v2, Data 330-7, 9/15/07

## **Dimensions & Specifications**

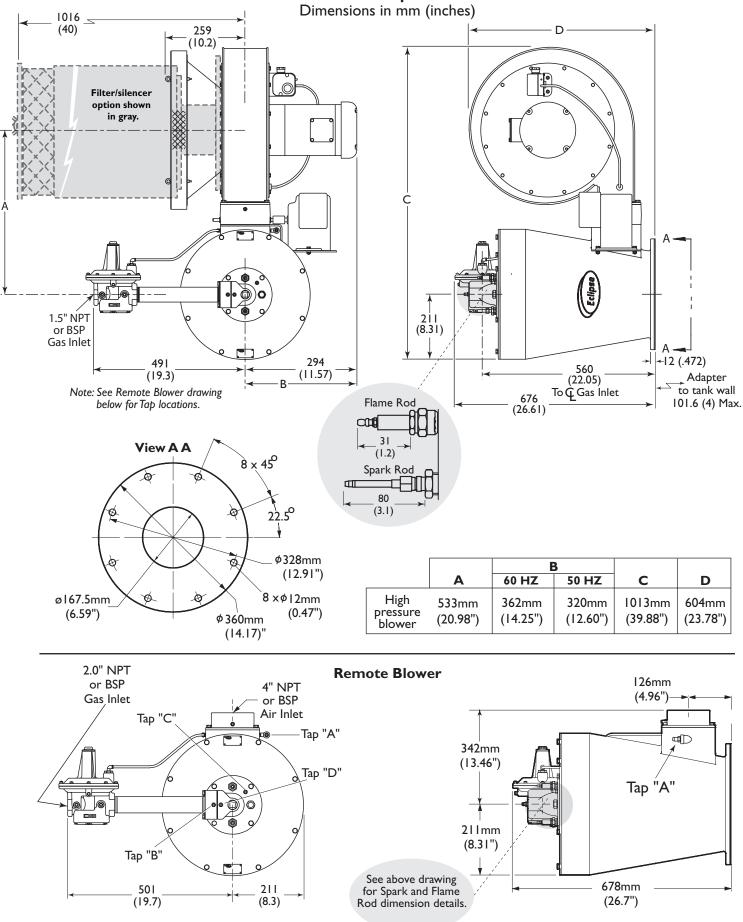



# Offered By: Power Equipment Company 2011 Williamsburg Road Richmond, Virginia 23231 Phone (804) 236-3800 Fax (804) 236-3882

www.peconet.com